



## Attenuators

Buildout attenuators provide superior performance for all single-mode in-line attenuation requirements. Standard attenuation values are 5, 10, 15, and 20 dB, available in SC, FC, ST, and LC connector styles. Using no air gap, filters, or light path discontinuities, attenuation is achieved by controlled absorption of light energy. This results in a polarization insensitive device with high power handling capability, environmentally stable, and exceptionally responsive, across a wide bandpass range.

### Features

- SC, FC, ST, and LC connector styles (Ultra & Angled Polish)
- Long-term reliability
- Low ripple, wavelength independent attenuation
- Certified to >125 mW continuous power handling capability with no performance degradation
- Polarization insensitive


### Application

- Broadband Network
- Fiber in the Loop
- Local Area Networks (LAN)
- Long Haul Telecommunications (CLEC, CAPS)
- Network Testing
- Passive Optical Networks
- Telco

### Specifications

| PARAMETER                    | VALUE                   |
|------------------------------|-------------------------|
| Standard Attenuation Values  | 5, 10, 15 and 20 dB     |
| Attenuation Tolerance        | Standard at 10%         |
| Vibration resistance         | <0.1X attenuation value |
| Operating Temperature Range: | -40°C to +75°C          |
| Storage Temperature Range:   | -40°C to +85°C          |

### Ordering Information

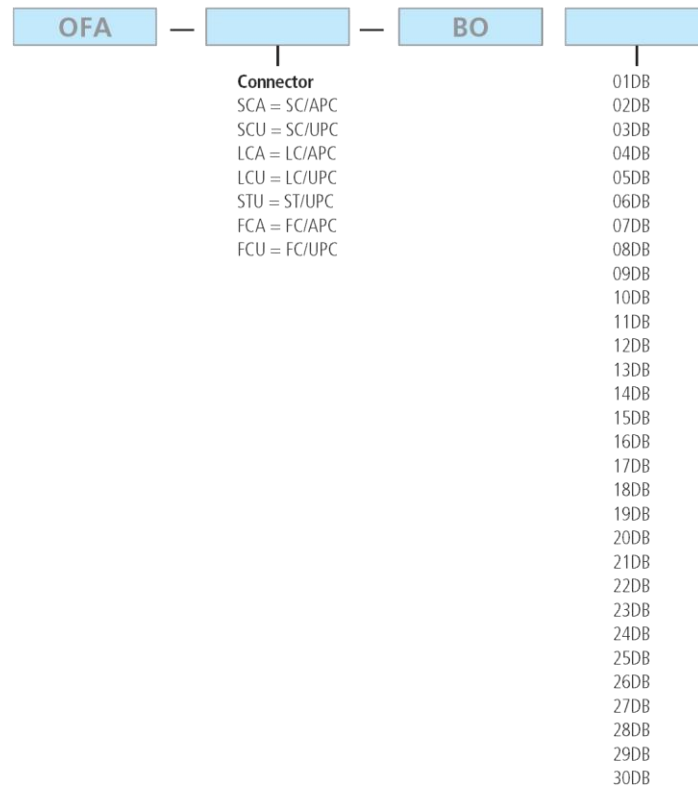

## PDR VIDEOTRONICS (INDIA) PVT. LTD.

99, Old Prabhadevi Road  
Mumbai 400 025 India

Tel: +91 22 2430 6494/2430 9536/2436 1647  
Mobile: +91 86910 00897/95946 56333

E-mail: [info@pdrworld.com](mailto:info@pdrworld.com)  
URL: <http://www.pdrworld.com>