



Pic#1



Pic#2



Pic#3




Pic#4

General Description


PDR Model No.:HT-FTB-48A can connect the drop cable with feeder cable as the termination point in the Fttx network, which is cable to meet at least 48 users requirements. It can help splicing, splitting, storage and management with suitable space.

Features:


- The body is made of high quality engineering plastic with good strength;
- With safe special-shaped lock, the box can be opened easily and has good water-proof performance, suitable for indoor and outdoor natural environments (Pic#1 for details);
- With double-page design, the box can be installed and maintained easily, the fusion and termination are completely separated(Pic#2 for details);

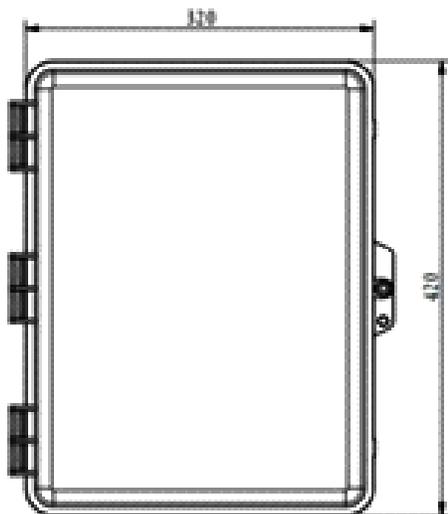

Top view

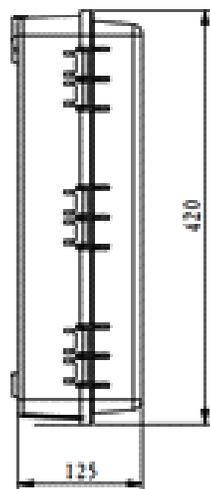

Side view

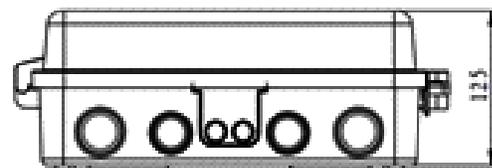

Front view

Technical Specifications: Model: PDR-HT-FTB-48A

Parameters	Particulars
Capacity	32 cores
Material	PC+ABS
Dimensions (LxWxD mm)	420x320x125
Clolor	Black, Grey, White
Protection Level	IP55
Flame Retardant Performance	Non-flame retardant

Package Information

- Plastic bag size: 600x500mm
- Inner box with single corrugated size: 425*365*140mm
- Carton with double corrugated size: 735*440*380mm(5PCS/Box)
- Weight per carton : 12.5 KG

PDR VIDEOTRONICS (INDIA) PVT. LTD.

99, Old Prabhadevi Road
Mumbai 400 025 India

Tel: +91 22 2430 6494/2430 9536/2436 1647
Mobile: +91 86910 00897/95946 56333

E-mail: info@pdrworld.com
URL: <http://www.pdrworld.com>