




Fan Out Patchcord



Short Boot Patchcord 90° Bendable Boot Patchcord

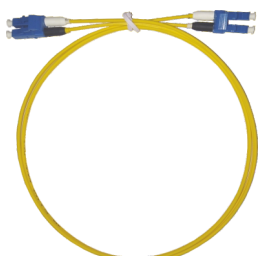


Uniboot Patchcord



1.6 mm Duplex Patchcord




Regular Patchcord

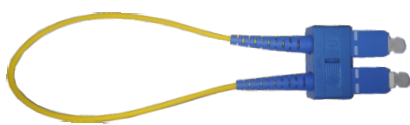

Loop Back Patchcord



Pigtail

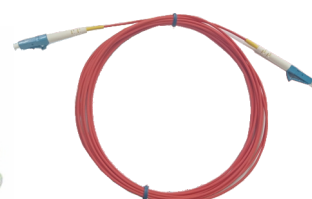

1.6 mm Simplex Patchcord

## General Description

PDR provides the broadest choice of patchcords to the industry. All PDR patchcords are tested utilising the industry's latest equipment and offer superior quality at low prices on all styles of patchcords. 100% Guaranteed!

Built to your specifications Simplex/Duplex patchcords with FC, DIN, LC, MU, MTRJ, SC, ST, MPO, D4, Biconic, SMA, E-2000 Connectors are available for either Multimode or Single mode systems. Upon request, PDR will colour code duplex patchcords for easier identification. PDR patchcord represents high quality, very low loss and maximum performance. A test data sheet can be included with every order upon customer request.


## Features

- Available in short boot, 90° bendable boot and regular boots
- IEC, EIA/TIA and GR-326-CORE compliant & CACT approved
- All Patchcords are ROHS compliant
- Simplex, Duplex and Fanout (upto 24F) type Patchcords, Pigtails available
- Excellent quality is achieved because of perfection in technology

## Main Characteristics

Optical Performance	Single-Mode	Multi-Mode
Diameter (mm)	0.9, 2.0, 3.0 or customised	
Fiber Cable	Simplex, Duplex or Customised	
Fiber Type	OS2, G657A1, G657A2	OM1, OM2, OM3, OM4
Insertion Loss (dB)	≤0.3 (PC)	≤0.3 (PC)
Return Loss (dB)	≥50 (UPC), ≥60 (APC)	≥35 (PC)
Exchangeability	≤0.2 dB	
Repeatability	≤0.2 dB	
Operating Temp.	-20 °C to +75 °C	
Storage Temp.	-40 °C to +85 °C	

## Technical Drawing

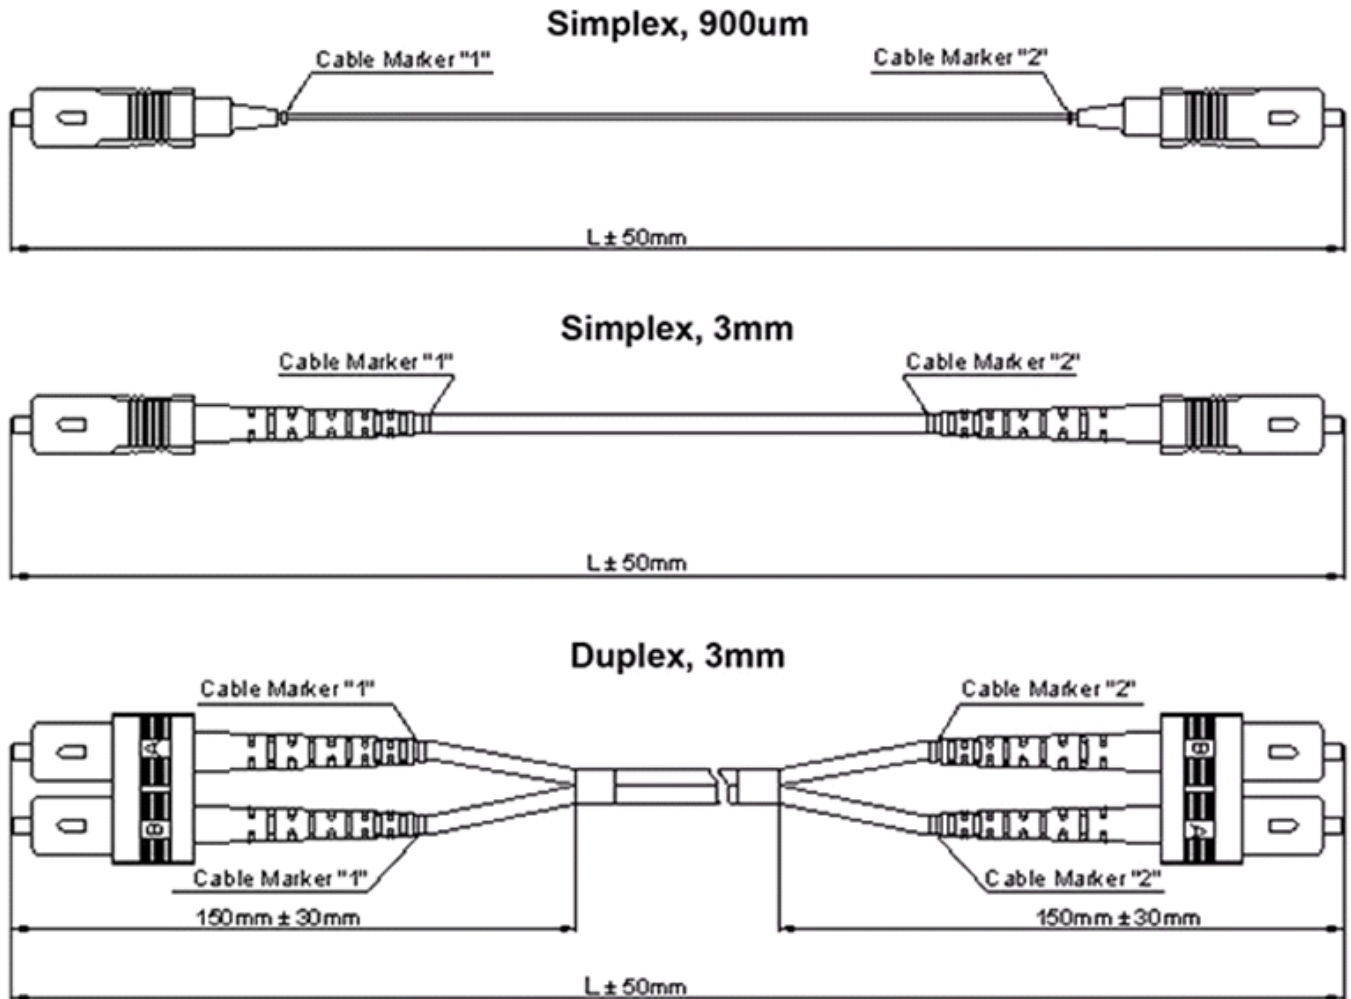

**PDR VIDEOTRONICS (INDIA) PVT. LTD.**

99, Old Prabhadevi Road  
Mumbai 400 025 India

Tel: +91 22 2430 6494/2430 9536/2436 1647  
Mobile: +91 86910 00897/95946 56333

E-mail: [info@pdrworld.com](mailto:info@pdrworld.com)  
URL: <http://www.pdrworld.com>